


**COMPAQ**

United States April 16, 1999

STORE | PRODUCTS | SERVICES | SUPPORT | CONTACT US | SEARCH

*network products*

## EtherWORKS 3 Turbo Adapters

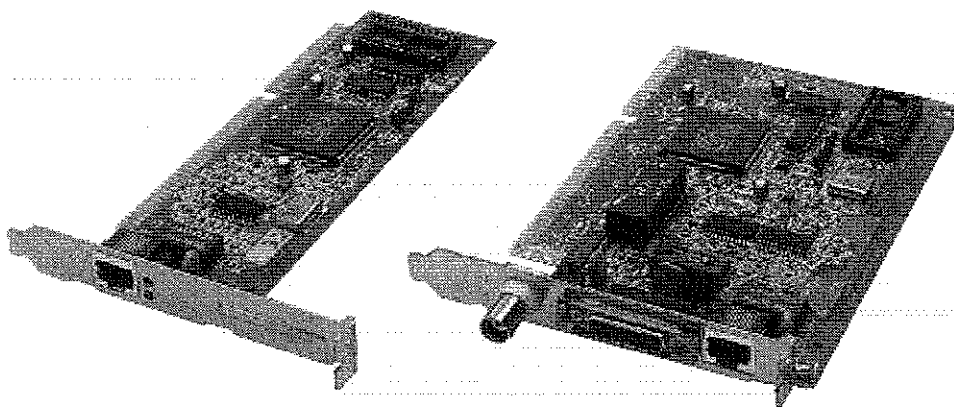

The EtherWORKS 3 Turbo adapters are high-performance, 16-bit ISA adapters designed to meet client and server needs.

- [Take a Closer Look...](#)
- [Download Product Data Sheet](#)
- [Download Drivers, Firmware or Manuals](#)

These low-cost adapters feature 128 KB of on-board buffer RAM—more than any Ethernet adapter in the industry. This RAM is dynamically allocated for optimal receive/transmit performance. These adapters deliver peak performance—even under the heaviest network traffic.

————— [highlights](#) ——— [closer look](#) ——— [features](#) ——— [specs](#) ——— [ordering info](#) ——— [top of page](#) . —————

### Highlights

- 128 KB of on-board buffer RAM ensures optimal receive/transmit performance— an advanced feature that is ideal for NetWare packet-burst mode and multitasking environments such as Windows NT
- Fast installation with EZWORKS— simple software commands; no switches or jumpers are required
- Lifetime Warranty

————— [highlights](#) ——— [closer look](#) ——— [features](#) ——— [specs](#) ——— [ordering info](#) ——— [top of page](#) . —————

## Features

Two models are offered:

EtherWORKS 3 Turbo TP, for TP connections.

EtherWORKS 3 Turbo Combo, with three connectors that support ThinWire, twisted-pair, and thick wire.

Drivers for NetWare, Windows 95, Windows NT, Windows for Workgroups, LAN Server, LAN Manager, PATHWORKS, Banyan VINES, SCO UNIX, UnixWare UNIX, OpenVMS, Digital UNIX, FreeBSD UNIX, Linux UNIX, Packet Driver, and MOP/RPL remote boot are included.

Each of these adapters is available in 5- and 25-packs, which brings their already low unit price even lower. A Lifetime Warranty is included.

Driver software upgrades are widely available on line via CompuServe, BBS, and the Internet.

See DIGITAL's [online information](#) for a complete list of software drivers. (**Note:** This graphic is best viewed printed on a laser-quality printer.)

----- [highlights](#) ----- [closer look](#) ----- [features](#) ----- [specs](#) ----- [ordering info](#) ----- [top of page](#) -----

## Specifications

	<b>EtherWORKS 3 Turbo TP</b>	<b>EtherWORKS 3 Turbo Combo</b>
Cable Interfaces	UTP	BNC, UTP, AUI
Slot Size	Half	Half
Buffer RAM	128 KB	128 KB

### **Physical Dimensions (actual board size exclusive of bracket and connectors)**

Height	2.38 in (6.04 cm)	4.25 in (10.78 cm)
Depth	6.75 in (17.1 cm)	6.25 in (15.9 cm)

### **Operating Environment**

Temperature	41 degrees F to 122 degrees F (5 degrees C to 50 degrees C)
Relative Humidity	10% to 90%

(noncondensing)

**Power Consumption**

5 Volts	300 mA	500 mA
12 Volts	10 mA	800 mA
MTBF (x 1000 hrs)	675.6	587.4

----- [highlights](#) --- [closer look](#) --- [features](#) --- [specs](#) --- [ordering info](#) --- [top of page](#) -----

**Ordering Information**

Description	Single Unit	5-Pack	25-Pack
EtherWORKS 3 Turbo TP	DE204-AB	DE204-BB	DE204-CB
EtherWORKS 3 Turbo Combo	DE205-AC	DE205-BC	DE205-CC

Note: For remote boot on a PATHWORKS network, order the EtherWORKS 3 MOP remote boot ROM (part number DE20M-AR).

----- [highlights](#) --- [closer look](#) --- [features](#) --- [specs](#) --- [ordering info](#) --- [top of page](#) -----



[NETWORKING HOME](#) | [PRODUCTS](#) | [NEWS](#) | [DOCUMENTATION](#) | [SUPPORT](#) | [FEEDBACK](#) | [SEARCH DIGITAL SITE](#)

[privacy and legal statement](#)

